

PILOT LIGHT

419.46 mm  
[16.514 in]


53.98 mm  
[2.125 in]

52.32 mm  
[2.060 in]


116.14 mm  
[4.573 in]

40.00 mm TYP  
[1.575 in]

ASSEMBLY - VIEW FROM TOP

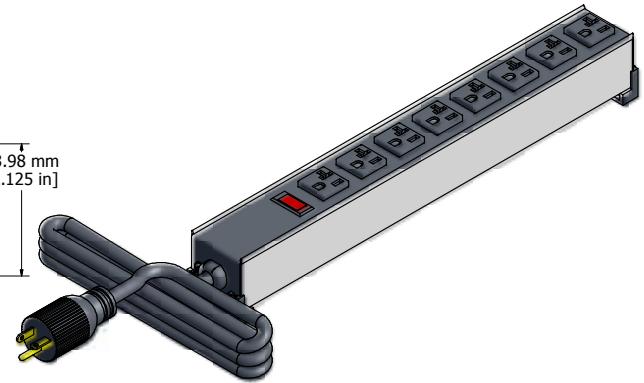

ISOMETRIC VIEW



6' FOOT  
POWER CORD  
(NEMA 5-20P)

413.11 mm  
[16.264 in]


2.31 mm  
[0.091 in]

59.28 mm  
[2.334 in]

387.71 mm  
[15.264 in]


9.53 mm  
[0.375 in]

ASSEMBLY - VIEW FROM SIDE

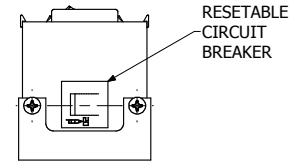

RESETTABLE  
CIRCUIT  
BREAKER

ASSEMBLY - VIEW FROM END



9.53 mm  
[0.375 in]

400.41 mm  
[15.764 in]

14.29 mm  
[0.563 in]

25.40 mm  
[1.000 in]

R4.37 mm  
[0.172 in]

ASSEMBLY - VIEW FROM BOTTOM

**1589T8\*\***

Finish - Top - Black Painted Steel

Bottom - Aluminum Extrusion

Rated - 120 VAC, 60 Hz, 20 Amps

Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99)

- UL Listed, Standard UL1363

**Cord Length**

1589T8F1 - 6' Foot Power Cord (NEMA 5-20P)

1589T8G1 - 15' Foot Power Cord (NEMA 5-20P)



**HAMMOND  
MANUFACTURING™**

**1589T8\*\***

www.hammondmfg.com